

Monroc Espresso Machine Install Pack



Monoroc

Thank you for selecting the Monoroc from the Crem Expobar range of high quality traditional espresso machines.

To ensure that your new machine will give you years of trouble free service, then please take the time to ensure that all of the requirements within this information pack are followed and that the pre-installation check list is completed and returned.

We have combined our genuine experience of building first-class espresso machines with creative solutions and the latest innovative technology. Therefore, you can be sure that all Monoroc machines deliver what they promise. That is, a perfectly brewed espresso to your customers every day, year after year.

Features

- Built-in volumetric motor pump, complete with two retention valves and solid particle filter
- Copper boiler with heat exchanger per group and pressure relief valve
- Group head with direct pre-infusion chamber
- One steam arm and one hot water tap
- Heating element low water level auto cut-off



Components of the highest quality




Cup tray with large capacity



Digital Group Control


Monroc Espresso Machine Install Pack

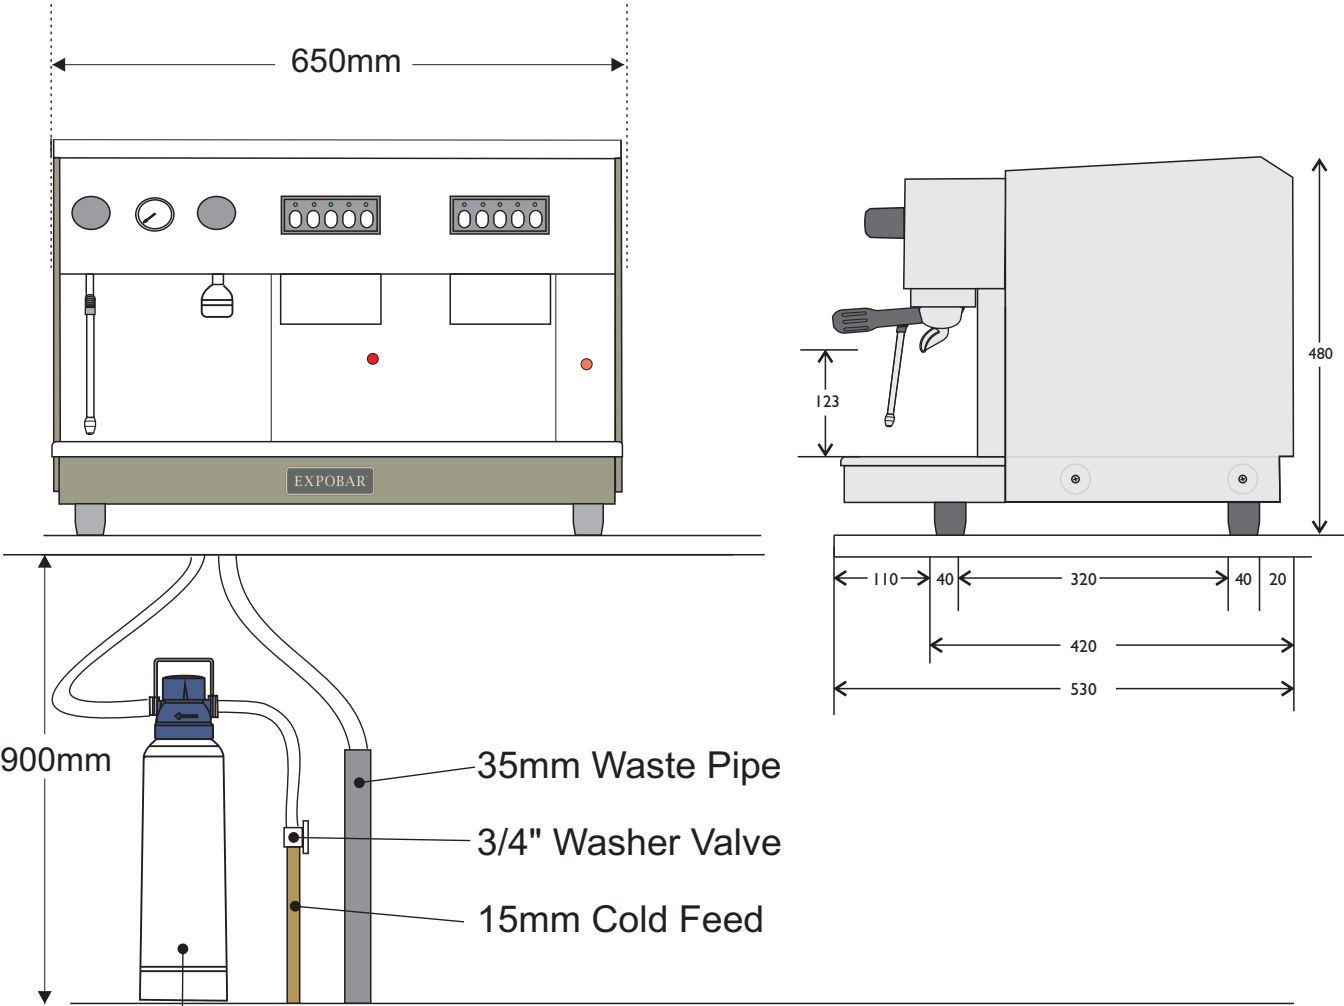

Bestmax Filter

WMMR	500x130
WMLR	530x145
WMXLR	530x145
WM2XLR	600x185

hole location through counter

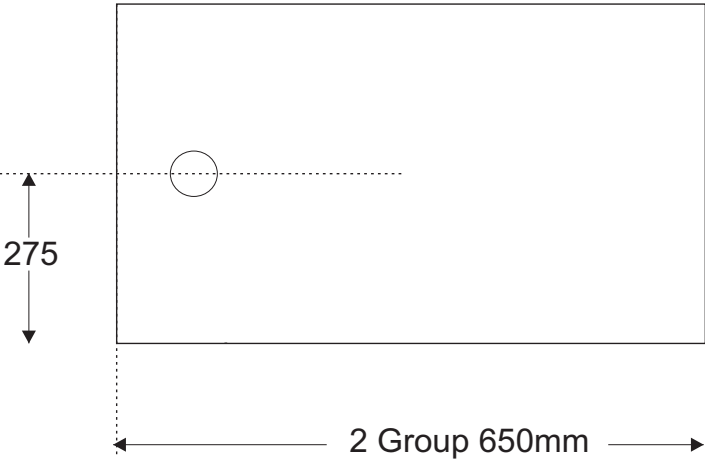

Monroc Espresso Machine Install Pack

technical specifications

Group	Power	Supply	Width mm	Depth mm	Height mm	Weight
2 Group	3250W/230V	16A Hard Wired	650	430	480	48Kg

pre-install check list

**Electrical supply within 1 metre.
See connection chart above.**

☐

**Preferred work surface height 900mm
(only for optimum working)**

☐

**15 mm Dedicated cold water supply
within 1 metre with 3/4" washer**

☐

**Has 50mm diameter hole been made
through work top for pipes/cables.**

☐

**35mm Trapped Waste Under work
top within 1 metre**

☐

**Space for water filter under work top
(see Bestmax dimensions on p2)**

☐

**Work top area complete and with
space for machine**

☐

Space for grinder with 13A socket

☐

**Is someone on site to help engineer lift
the machine.**

☐

**The electrical and water supplies
are working?**

☐

Work top capable of supporting

☐

**Is there coffee and cups on site so
the engineer can commission the
machine?**

☐

**Are there any site access issues that the
engineer should be made aware of?**

install address:

**Please sign and date the declaration below to
confirm all the above is correct, and please fax or
post back to us. If for any reason the engineer can
not install the machine on your preferred date
due to any of the above being false, a recall
charge of £120.00 + Vat will be become payable
to cover the engineer expenses.**

install date req. / /

name:

telephone:

signed:

date: / /