

Rosetta espresso machine pre-install pack



ROSETTA

Thank you for selecting the Rosetta from the Crem Expobar range of high quality traditional espresso machines.

To ensure that your new machine will give you years of trouble free service, then please take the time to ensure that all of the requirements within this information pack are followed and that the pre-installation check list is completed and returned.

We have combined our genuine experience of building first-class espresso machines with creative solutions and the latest innovative technology. Therefore, you can be sure that all Rosetta machines deliver what they promise. That is, a perfectly brewed espresso to your customers every day, year after year.

Features

as standard, all models in the Rosetta range have a large steam tank. The machines with a display are also equipped with an advanced PID sensor system so that the water always keeps an exact brewing temperature. The temperature is continuously monitored and is rapidly adjusted if it changes.



Components of the highest quality




Cup tray with large capacity and detailed cup rail




Display

Rosetta espresso machine pre-install pack

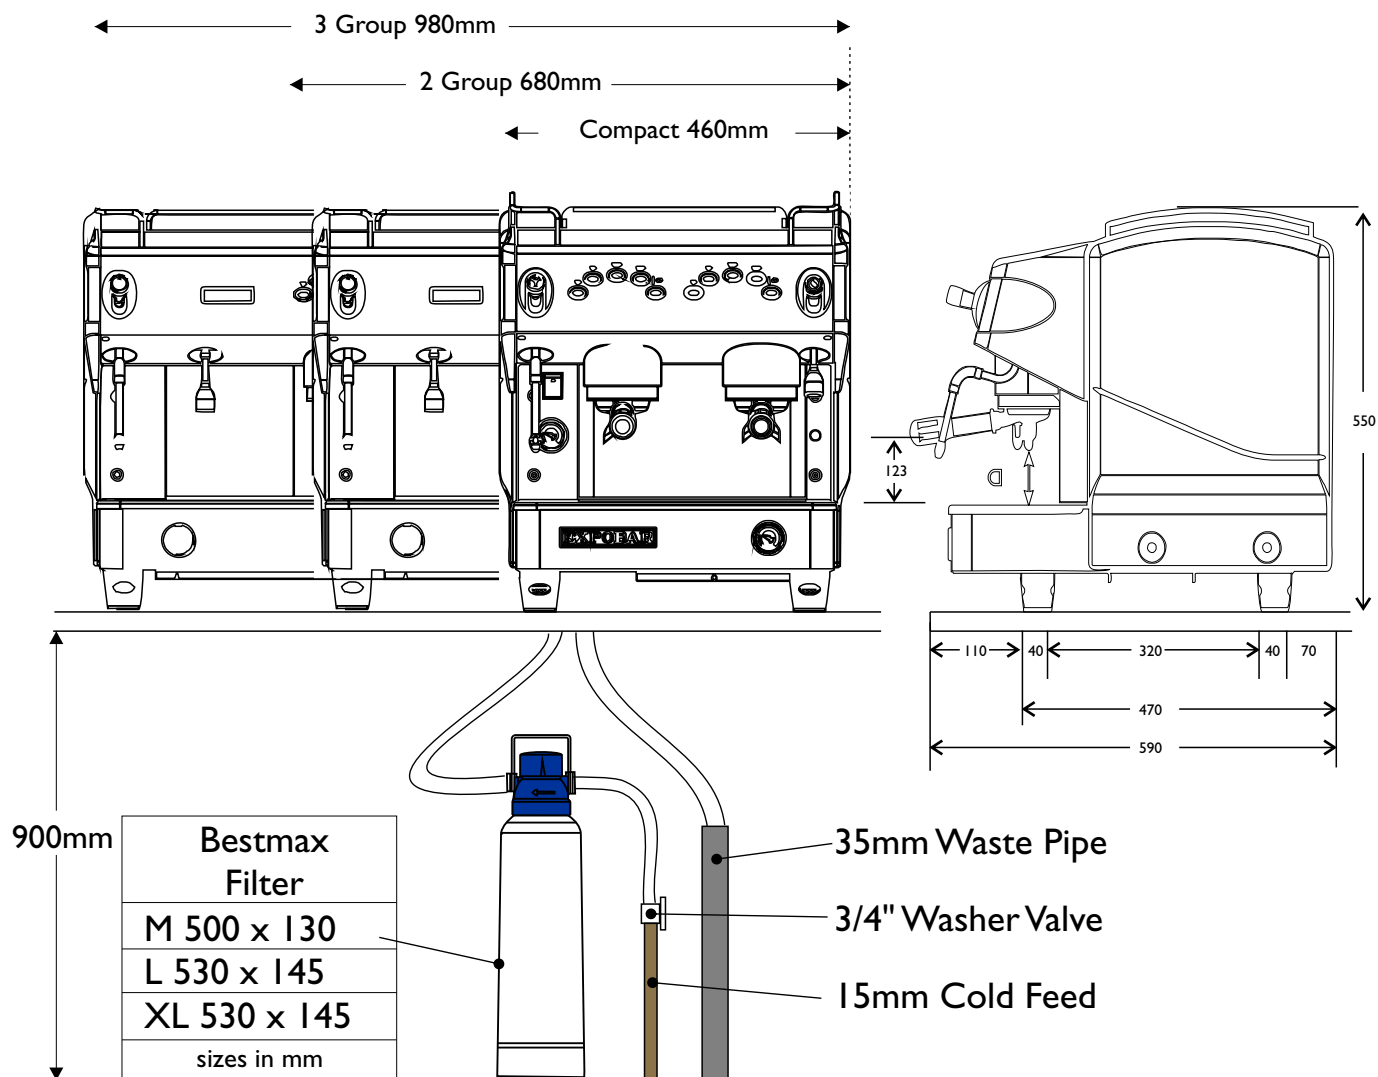

hole location through counter

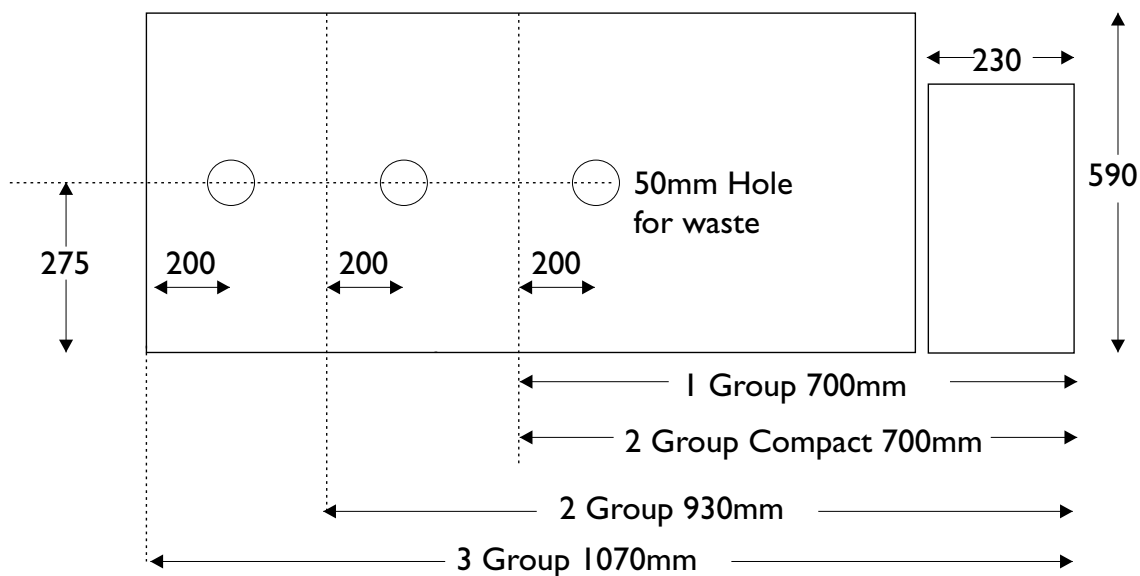

Rosetta espresso machine pre-install pack

technical specifications

Group	Power	Supply	Width mm	Depth mm	Height mm	Weight
2 Group Compact	2780W/230V	13A Socket	460	590	550	40Kg
2 Group	3650W/230V	20A Hard Wired	680	590	550	55Kg
3 Group	6290W/380V	3 phase + N	980	590	550	73Kg

pre-install check list

**Electrical supply within 1 metre.
See supply chart above.**

☐

**Preferred work surface height 900mm
(only for optimum working)**

☐

**15 mm Dedicated cold water supply
within 1 metre with 3/4" washer tap.**

☐

**Has 50mm diameter hole been made
through work top for pipes/cables. (see
p2)**

☐

**35mm Trapped Waste Under work top
within 1 metre**

☐

**Space for water filter under work top
(see Bestmax dimensions on p2)**

☐

**Work top area complete and with
space for machine**

☐

**Is someone on site to help engineer lift the
machine.**

☐

Space for grinder with 13A socket

☐

**The electrical and water supplies are
working?**

☐

Work top capable of supporting weight

☐

**Is there coffee and cups on site so the
engineer can commission the machine?**

☐

**Are there any site access issues that the
engineer should be made aware of?**

install address:

Please sign and date the declaration below to confirm all the above is correct, and please email or post back to us. If for any reason the engineer can not install the machine on your preferred date due to any of the above being false, a recall charge at the current rate will become payable to cover the engineer expenses.

install date req. / /

name: _____

signed: _____

telephone: _____

date: / /