

Technical Service Bulletin			
Edition: Final V1	TSB#: 493 (ECR1905)	Issue date: May 26, 2023	Page 1 of 2

Title: Improve capsule kits to avoid cracking the capsule

Old parts no longer used / New parts to be implemented:

OLD Part – no longer available:	NEW Part – now available:	For Machine Types:
75200011_Capsule_Sprinkler_REV04	75200022_Capsule_Sprinkler_REV01	ESC70006 ESC70009 ESC70011
75200063_Drilling_Disc_REV03	75200074_Drilling_Disc_REV01	
25096620_Philips_Screw_M5X12 DIN 966	25798541_Philips_Screw_M4X10 DIN7985	

Applies to machine types:

- ESC70006_CAPSULE_HODLER_MIO
- ESC70009_CAPSULE_HODLER_LVZ_BLUE_0.5
- ESC70011_CAPSULE_HODLER_LVZ_BLUE_2_CUPS_0.5

Implemented from first serial number:

- May 2023

Change information:

Improve the capsule sprinkler to avoid damaging the capsule while inserting/removing the portafilter.

Backward compatibility:

New capsule sprinkler (PN75200022) IS NOT compatible with the old capsule holder (PN75200063). If you need to replace PN75200063, it is recommended to order the new three parts.

Machines in the field:

For machines in the field, require no change.

Warranty information:

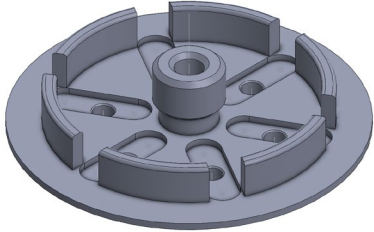
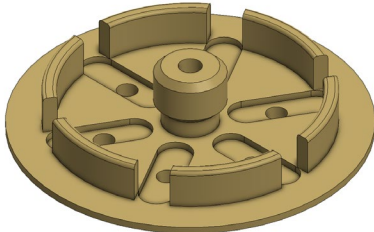
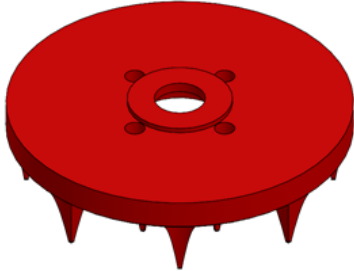
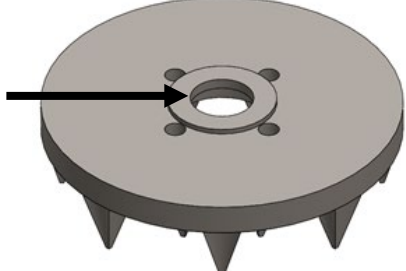
No warranty changes.

Spare part information:

The new part(s) will be the spare part(s) offered for all after sales services.

Technical Service Bulletin			
Edition: Final V1	TSB#: 493 (ECR1905)	Issue date: May 26, 2023	Page 2 of 2

Improvement descriptions:

<p>Old Version: 75200011_Capsule_Sprinkler_REV04</p>	<p>New Version: 75200022_Capsule_Sprinkler_REV01</p>
	
<p>Old Version: 75200063_Drilling_Disc_Capsule_REV03</p>	<p>New Version: 75200074_Drilling_Disc_Capsule_REV01</p>
<p>Internal Ø5</p> 	<p>Internal Ø6</p> 
<p>Old Version: 25096620_Philips_Screw_M5X12 DIN 966</p>	<p>New Version: 25798541_Philips_Screw_M4X10 DIN7985</p>
