Tower machine pre-install pack



CQube

Thank you for selecting the Tower from the Crem Coffee Queen range of high quality machines.

To ensure that your new machine will give you years of trouble free service, then please take the time to ensure that all of the requirements within this information pack are followed and that the pre-installation check list is completed and returned to us.

Is a quick easy to use urn brewer with tea water outlet. With its high capacity and ease of use, it also makes coffee easy to serve at really large events. It brews coffee directly into 5 litre serving stations (thermoses) which have unique temperature retention. The temperature only falls one degree Celsius per hour. The serving stations have a practical tap, level indication tube and integrated carrying handle for simple handling. Lift the serving station off the brewer and put it wherever you want to serve the coffee. Quick and easy. Since no external heat is supplied, the coffee retains its excellent taste and aroma.

Features

- Automatic water filling
- High capacity tea water outlet
- Full and half brew function
- 5 ltr tank capacity
- 175-350 cups per hour
- Serving station concept
- Rapid 7 min brewing cycle
- Digital display and audio signal when brewing is complete



Full or half brew selection with digital display




Fast draw taps on stations and hot water outlets



Economical extra serving stations - 1°C per hour temp drop

Tower

Tower machine pre-install pack

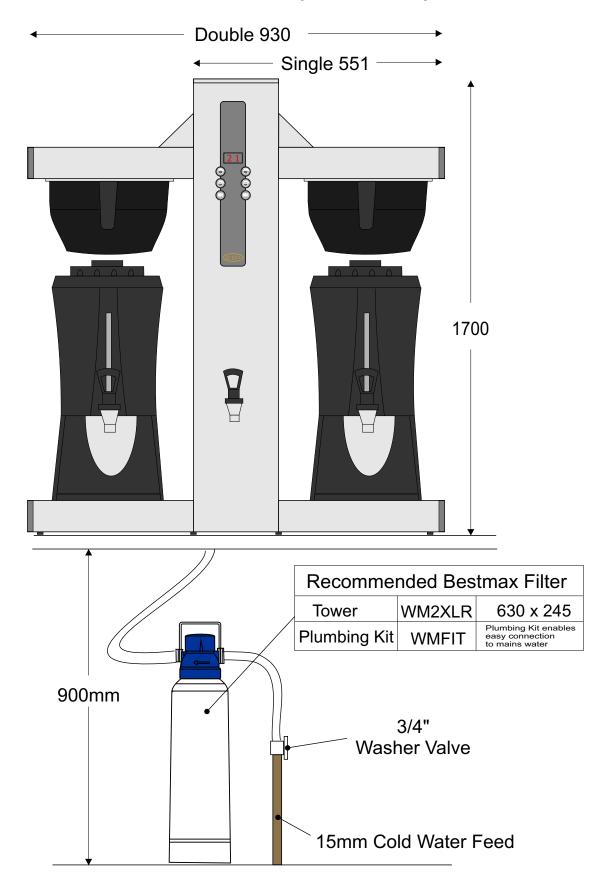

technical specifications

Model	Power supply	Boiler (litres)	Width mm	Depth mm	Height mm A	Amps	Weight
Single Tower	9000W/415V+N	5	551	500	950	40.0A	25Kg
Double Tower	9000W/415V+N	2 x 5	930	500	950	40.0A	30Kg

Tower

Tower machine pre-install pack

technical specifications

Model	Power supply	Electrical Connection	Depth mm	Height mm	Amps	Weight
Single Tower	9000W/415V+N	3 Phase + N + E	500	950	40.0A	25Kg
Double Tower	9000W/415V+N	3 Phase + N + E	500	950	40.0A	30Kg

pre-install check list	
Electrical supply socket within 1 metre. See connection chart above.	Preferred work surface height 900mm (only for optimum working)
15 mm Dedicated cold water supply within 1 metre with 3/4" washer tap.	Has 40mm diameter hole been made through work top for pipes/cables. (see p2)
Work top area complete and with space for machine	Space for water filter under work top (see Bestmax dimensions on p2)
The electrical and water supplies are working?	Work top capable of supporting weight
Is there coffee/ingreedients and cups on site so the engineer can commission the machine?	Are there any site access issues that the engineer should be made aware of?
install address:	 Please sign and date the declaration below to confirm all the above is correct, and please fax or post back to Crem International UK Ltd. If for any reason the engineer can not install the machine on your preferred date due to any of the above being false, a recall charge of £120.00 + Vat will be become payable.
install date req. / /	 Crem International UK Ltd Unit 3b Bentley Wood Way Network 65 Business Park Burnley, Lancashire, BB11 5ST.
name:	 signed:
telephone:	 date: / /

Tower machine pre-install pack



Double Tower

Single Tower



Extra serving stations with Optional display lids

Basic facts

Model	Capacity	Width mm	Depth mm	Height mm	Amps	Weight
Single Tower	5 litre in 5 min = 175 cups/h	551	500	950	40.0A	25Kg
Double Tower	2 x 5 litre in 5 min = 350 cups/h	930	500	950	40.0A	30Kg

4

Crem International UK Ltd Unit 3b Bentley Wood Way Network 65 Business Park Burnley, Lancashire, BB11 5ST.

Tel. 01282 458473 Fax. 01282 450355 www.creminternational.co.uk

